

## CEG2-0800 Series


8-Port Industrial Compact Gigabit Ethernet Switch  
 -8\*10/100/1000BASE-T, 12-48VDC Power Input



- 8-port 10/100/1000BASE-T Gigabit Ethernet
- Redundant power inputs design, 12-48VDC
- IP30 Rugged Metal Case Design
- Operating temperature range - STD: -10°C ~ 65°C, EOT: -40°C ~ 75°C



### Dimension

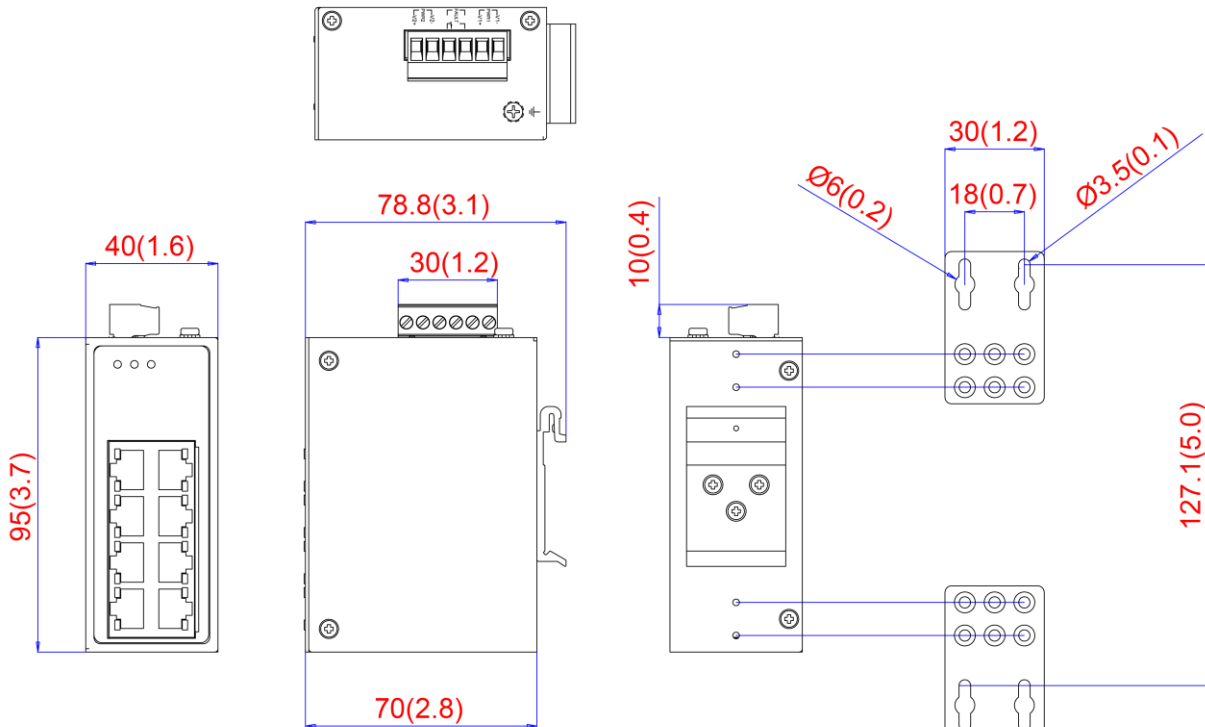

Unit: mm (inch)

Din-rail

Wall-mount

## Specification

### Technology

Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x Flow Control, back pressure flow control

### Switch Properties

Switching Fabric (Back-Plane)	16Gbps
Memory Buffer	1.5Mbits
MAC Table Size	4K
Jumbo Frame	9,216 bytes
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet Port

### Interface

RJ45 Ports	8*10/100/1000BASE-T Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X
LED Indicators	System: Power 1, Power 2, Fault Ethernet ports: On-Link/Flash-data transmitting
Relay Contact	24 VDC, 1A resistive
Network Cable	10BASE-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BASE-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BASE-T: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)

### Power Requirements

Input Voltage	Dual 12-48VDC redundant power inputs
Power Connection	1*removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blow Fuse)
Reverse Polarity Protection	Present
System Power Consumption	Max. 3.3W full loading

### Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions (W x H x D)	40 x 95 x 70 mm (1.6 x 3.7 x 2.8 inch)
Weight	Unit weight: 0.33kg (0.72 lb), Shipping weight: 0.47kg (1.03 lb)
Mounting	DIN-Rail Mounting, Wall Mounting

### Environmental Limits

Operating Temperature	STD: -10°C ~ 65°C (14°F ~ 149°F) EOT: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)

### Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2 IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Safety	UL61010-1, UL61010-2-201
Compliance	NEMA TS2 (ITS) (apply by request)

MTBF (Telcordia SR-332, Issue 3, GB, 25°C) 1,385,885 hrs.

Warranty 5 Years

**NOTE: Due to continuous improvement, all product specifications are subject to change without further notice.**

## Packet Contents

	pcs
CEG2-0800(-T) Ethernet switch	1
Wall-mount installation kits	2
Quick installation guide (printed)	1

## Comparison Table

Model Name	10/100/1000 GbE	100/1000 SFP	Power Inputs	Operating Temperature
CEG2-0800	8	-	12-48VDC	-10°C ~ 65°C
CEG2-0800-T	8	-	12-48VDC	-40°C ~ 75°C

## Ordering Information

CEG2-0800	8-Port Industrial Compact Gigabit Ethernet Switch - 8*10/100/1000BASE-T, 12-48VDC, -10°C ~ 65°C
CEG2-0800-T	8-Port Industrial Compact Gigabit Ethernet Switch - 8*10/100/1000BASE-T, 12-48VDC, -40°C ~ 75°C

## Optional Accessories - Power Supply Series

### 30W Power Supply Series

HDR-30-24	36W Industrial DIN-Rail Power Supply, 24VDC/1.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -30°C ~ 70°C
-----------	---

### 60W Power Supply Series

HDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 88-264VAC/124-370VDC power input, Plastic, -30°C ~ 70°C
MDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -20°C ~ 70°C

### 75W Power Supply Series

EDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
NDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

### 120W Power Supply Series

EDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
NDR-120-24	120W Industrial DIN-Rail Power Supply, 24VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
NDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

### 240W Power Supply Series

NDR-240-48	240W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
SDR-240-24	240W Industrial DIN-Rail Power Supply w/ PFC, 24VDC/10A, Universal 88-264VAC/124-370VDC power input, Metal, -25°C ~ 70°C

### 480W Power Supply Series

NDR-480-48	480W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/10A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	--