

## CBG5-0602-SFP-Lite Series

6-Port Industrial Compact Managed Gigabit Ethernet 802.3bt PoE Switch


-4\*10/100/1000BASE-T with bt PoE-PSE (90W/Port) +  
 2\*100/1000BASE-X SFP Slots



- 4-port 10/100/1000BASE-T Ethernet with IEEE 802.3af/at/bt compliant PoE, 90W/port
- 2-port dual rate 100/1000BASE-X SFP slots
- Persistent PoE, PoE Ping Alive
- Multiusers account for security
- Configuration: HTTP, HTTPS, CLI Command, Telnet, SNMP, SSH
- Network redundancy support: G.8032 ERPS v2/ STP/ RSTP/ MSTP
- Supports Static routes for routing function
- Supports RADIUS, TACACS+ authentication protocol
- Supports QoS, LACP bandwidth control
- Supports VLAN, SNMP v1/v2c/v3, ACL, IP source guard for Ethernet security
- Redundant power inputs design
- Operating temperature range - STD: -10°C ~ 65°C, EOT: -40°C ~ 75°C



### Dimension

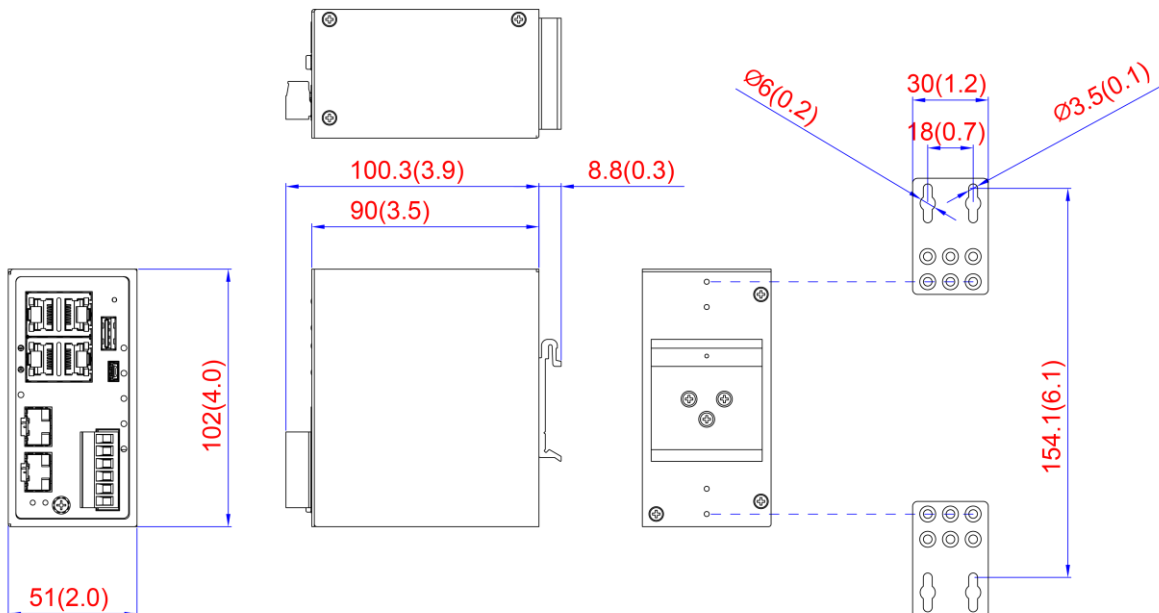

Unit: mm (inch)

Din-rail


Wall-mount

## Introduction


Leonton's CBG5-0602-SFP-Lite Series is a 6-port full managed gigabit PoE Ethernet switch, which provides 4\*10/100/1000BASE-T with IEEE 802.3 bt PoE compliant and 2\*100/1000BASE-X SFP slots. CBG5-0602-SFP-Lite Series is a full manageable Layer-2 Ethernet switch series and supports power inputs redundancy and PoE function with 90W per port output. CBG5-0602-SFP-Lite Series offers standardized network redundancy ITU-T G.8032 ERPS v2 (Ethernet Ring Protection Switch) protocol, providing <50ms recovery time to the network, to give user the chance to choose your Ethernet switch but not tied up with particular brand's product.

CBG5-0602-SFP-Lite Series as an industrial Ethernet switch product line, is designed to withstand harsh and extreme environment conditions. With fan-less design, CBG5-0602-SFP-Lite series still manages to be applied in extremely polarized temperature, from -40°C to 75°C, making it the best choice in various industrial applications.

## Application

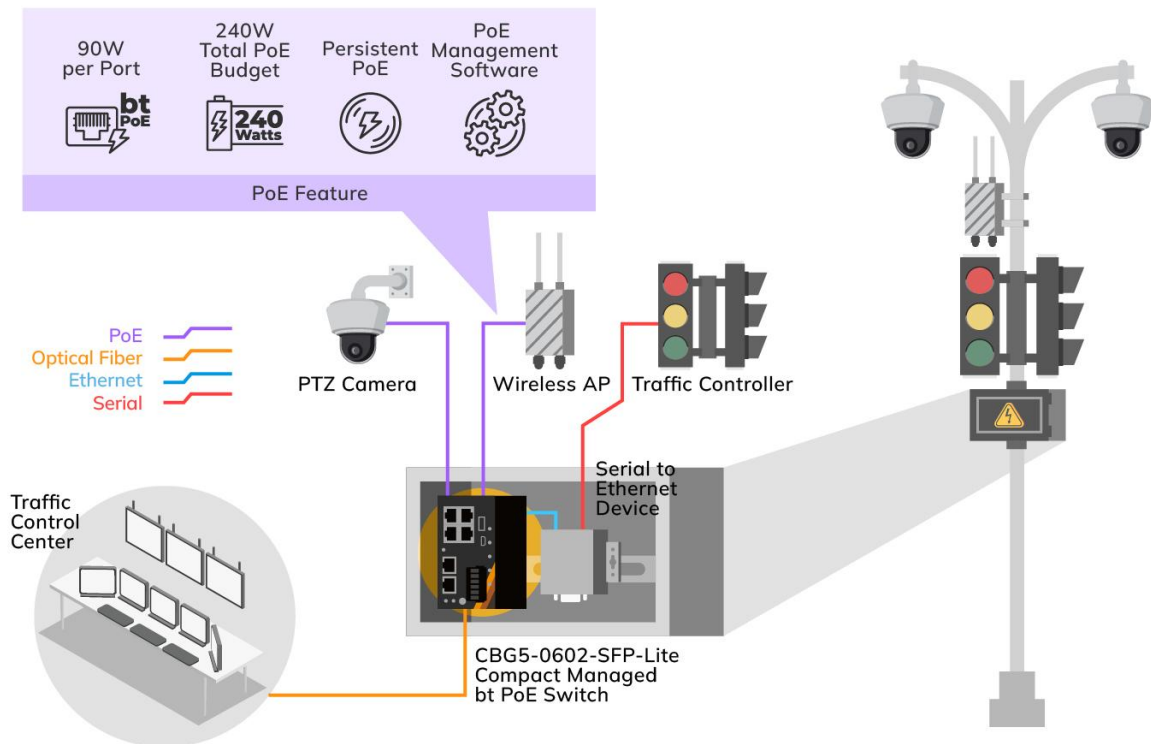

## USB Backup/Restore Function

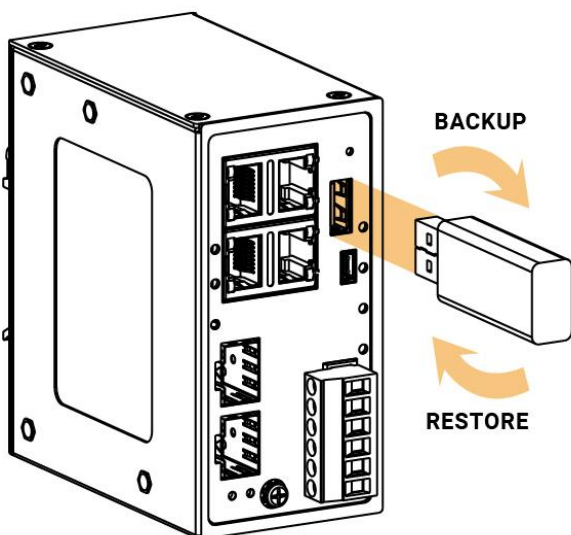

Leonton's Managed Ethernet switch series supports USB 2.0 flash drive, which allows user to backup and restore the device configuration to meet the need of quick device swap. And USB port on Managed Ethernet switch series is applicable to the most common USB flash drives, hugely elevating convenience for user.

## Specification

### Technology

Standards	<p>IEEE 802.3 10BASE-T Ethernet</p> <p>IEEE 802.3u 100BASE-TX Fast Ethernet</p> <p>IEEE 802.3ab 1000BASE-T Gigabit Ethernet</p> <p>IEEE 802.3z 1000BASE-X Gigabit Fiber</p> <p>IEEE 802.3af/at Power over Ethernet</p> <p>IEEE 802.3bt compliant PoE, 90W/port</p> <p>IEEE 802.3x Flow Control</p> <p>IEEE 802.1D STP (Spanning Tree Protocol)</p> <p>IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)</p> <p>IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)</p> <p>ITU-T G.8032 / Y.1344 ERPS v1/v2(Ethernet Ring Protection Switch)</p> <p>IEEE 802.1Q Virtual Local Area Network (VLAN)</p> <p>IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization</p> <p>IEEE 802.1X Network Authentication</p> <p>IEEE 802.1AB Link Layer Discovery Protocol (LLDP)</p> <p>IEEE 802.3ad Link Aggregation (LACP)</p>
Processing Type	Store and Forward
Flow Control	IEEE 802.3x Flow Control, back pressure flow control
<b>Network Management</b>	
Management	<p>IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 Telnet, DHCP Client, DHCPv6 Client, DHCP server, Port Mirror, DNS Client/Proxy, IP Based Access Filter, ICMPv6, Syslog, Time Zone /Daylight Saving, NTP Client, RMON, sFlow, Loop Detection, Console Port, USB configuration backup/restore, Power Lost Warning, Relay Trigger</p>
Security	<p>Port-Based/Single/Multi 802.1X, Access Control List (ACL), MAC-based Authentication, VLAN assignment, QoS Assignment, Private VLAN, Guest VLAN, RADIUS Accounting, TACACS+, IP MAC binding, WEB/CLI Authentication, Authorization (15 levels), Port Security, ACLs for filtering/policing/port copy, IP source guard, ARP Inspection</p>
L2 Switching	<p>Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU Guard, Error Disable Recovery, IGMP Snooping v2/v3, MLD snooping v1/v2, IGMP Filtering, IPMC Throttling / Filtering Leave Proxy, DHCP Snooping, G.8032 v1/v2, DHCP option82</p>
L3 Switching	Static Routes, IP Interface
QoS	<p>802.1p Queueing, Input Priority Mapping, Storm Control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port Egress Shaper, Queue Egress Shaper, DiffServ (DSCP), Tag remarking, Scheduler mode</p>
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az Energy Efficient Ethernet (EEE)
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)
PoE	PoE/PoE+ port power allocation, Power budget protection, PoE output scheduled, PoE alive check and remote reboot PD device
System / Diagnostics	Dual Image Protection, PING, PING6
SNMP MIBs & RFC Standards	<p>RFC 2674 VLAN MIB</p> <p>IEEE-802.1Q bridge MIB 2008</p> <p>RFC 2819 RMON (group 1, 2, 3, and 9)</p> <p>RFC 1213 MIB II</p> <p>RFC 1215 TRAPS</p> <p>RFC 4188 bridge</p> <p>RFC 4292 IP forwarding table</p> <p>RFC 4293 management information base for the Internet Protocol (IP)</p> <p>RFC 5519 multicast group membership discovery</p> <p>RFC 4668 RADIUS auth. client</p> <p>RFC 4670 RADIUS accounting</p> <p>RFC 3635 Ethernet-like</p> <p>RFC 2863 interface group MIB using SMI v2</p> <p>RFC 3636 802.3 MAU</p>

RFC 4133 entity MIB v3  
 RFC 3411 SNMP management frameworks  
 RFC 3414 user-based security model for SNMPv3  
 RFC 3415 view-based access control model for SNMP  
 RFC 2613 SMON – PortCopy  
 IEEE 802.1 MSTP  
 IEEE 802.1AB LLDP-MIB (LLDP MIB included in a clause of the STD)  
 IEEE 802.3ad (LACP MIB included in a clause of the STD)  
 IEEE 802.1X (PAE MIB included in a clause of the STD)  
 TIA 1057 LLDP-MED (MIB is part of the STD)  
 RFC 3621 LLDP-MED Power (POE) (No specific MIB for POE+ exists)

#### Switch Properties

Switching Fabric (Back-Plane)	12Gbps
Priority Queues	8
Max. Number of VLANs	4095
VLAN ID Range	VID 1 to 4095
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
IGMP Group	1024
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port

#### Interface

RJ45 Ports	4*10/100/1000 Base-T(X) with bt PoE-PSE (90W/Port) Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X
PoE Pin Out	V-, V-, V+, V+, for pin 1, 2, 3, 6; V+, V+, V-, V-, for pin 4, 5, 7, 8 *Support Modes: Mode A, Mode B, 4-Pair Mode
Fiber Port	2*100/1000Base-(F)X SFP slots
Wavelength	Depends on SFP modules
LED Indicators	System: Power 1, Power 2, Master, Ring, Status Ethernet ports: Speed/Link/Active PoE: On-connected to PD devices SFP: Link/Active PoE Load: 50%, 70%, 90%
RS232 Serial Console	Provided one Mini USB B type connector for RS-232 serial signal transmission
Configuration Backup	1*USB 2.0 host (type-A) for configuration backup/restore
Relay Contact	24 VDC, 1A resistive
Network Cable	10BASE-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BASE-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BASE-T: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
Optical Cable	Multi-mode cable - 50/125um or 62.5/125um, Single-mode cable - 9/125um or 10/125um

#### Power Requirements

Input Voltage	Dual 48-55VDC redundant power inputs * For IEEE802.3 bt application, power supply not less than 53V is recommended
Power Connection	1*removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blow Fuse)
Reverse Polarity Protection	Present
System Power Consumption	Max. 10.8W full loading
Max. PoE Power Budget	240W@48-55VDC
PoE Power Output	90W max. per PoE port

#### Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions (W x H x D)	51 x 102 x 90 mm (2.0x 4.0 x 3.5 inch)

Weight	Unit weight: 0.726kg (1.60lb), Shipping weight: 1.024kg (2.26lb)
Mounting	DIN-Rail Mounting, Wall Mounting
<b>Environmental Limits</b>	
Operating Temperature	STD: -10°C ~ 65°C (14°F ~ 149°F) EOT: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)
<b>Regulatory Approvals</b>	
EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Safety	UL61010-1, UL61010-2-201
MTBF (Telcordia SR-332, Issue 3, GB, 25°C)	532,087 hrs.
Warranty	5 Years

**NOTE: Due to continuous improvement, all product specifications are subject to change without further notice.**

## Packet Contents

	pcs
CBG5-0602-SFP-Lite(-T) Ethernet switch	1
Mini-USB B type male to DB9 RS-232 female cable	1
Wall-mount installation kits	2
Quick installation guide (printed)	1

## Comparison Table

Model Name	10/100/1000 bt PoE++	100/1000 SFP	Power Inputs	PoE Max. Power Budget	Operating Temperature
CBG5-0602-SFP-Lite	4	2	48-55VDC	240W	-10°C ~ 65°C
CBG5-0602-SFP-Lite-T	4	2	48-55VDC	240W	-40°C ~ 75°C

## Ordering Information

CBG5-0602-SFP-Lite	6-Port Industrial Compact Managed Gigabit Ethernet 802.3bt PoE Switch -4*10/100/1000BASE-T with bt PoE-PSE (90W/Port) + 2*100/1000BASE-X SFP Slots, 48-55VDC, -10°C ~ 65°C
CBG5-0602-SFP-Lite-T	6-Port Industrial Compact Managed Gigabit Ethernet 802.3bt PoE Switch -4*10/100/1000BASE-T with bt PoE-PSE (90W/Port) + 2*100/1000BASE-X SFP Slots, 48-55VDC, -40°C ~ 75°C

## Optional Accessories - Power Supply Series

<b>75W Power Supply Series</b>	
EDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
NDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal,

-20°C ~ 70°C

### 120W Power Supply Series

EDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
NDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

### 240W Power Supply Series

NDR-240-48	240W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	---

### 480W Power Supply Series

NDR-480-48	480W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/10A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	--

## OPTIONAL ACCESSORIES - SFP Transceiver Series

### 100Mbps Multi-mode SFP Transceiver Modules Series

SFP-TM02	100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C
SFP-TM02-T	100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C

### 100Mbps Single-mode SFP Transceiver Modules Series

SFP-TS20-WA	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-TS20-WA-T	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C
SFP-TS20-WB	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-TS20-WB-T	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C
SFP-TS30	100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, 0°C ~ 70°C
SFP-TS30-T	100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, -40°C ~ 85°C

### 1Gbps Multi-mode SFP Transceiver Modules Series

SFP-GM00	1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, 0°C ~ 70°C
SFP-GM00-T	1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, -40°C ~ 85°C
SFP-GM02	1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C
SFP-GM02-T	1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C

### 1Gbps Single-mode SFP Transceiver Modules Series

SFP-GS10	1Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, 0°C ~ 70°C
SFP-GS10-T	1Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, -40°C ~ 85°C
SFP-GS10-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS10-WA-T	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C
SFP-GS10-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS10-WB-T	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C
SFP-GS20	1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, 0°C ~ 70°C
SFP-GS20-T	1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, -40°C ~ 85°C
SFP-GS40	1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, 0°C ~ 70°C
SFP-GS40-T	1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, -40°C ~ 85°C
SFP-GS40-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS40-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS60	1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, 0°C ~ 70°C
SFP-GS60-T	1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, -40°C ~ 85°C
SFP-GS60-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS60-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS80	1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, 0°C ~ 70°C
SFP-GS80-T	1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, -40°C ~ 85°C
SFP-GSH2	1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, 0°C ~ 70°C
SFP-GSH2-T	1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, -40°C ~ 85°C

### Copper SFP Transceiver Modules Series

SFP-GC00-SG	SFP to 10/100/1000BASE-T copper Module, 0°C ~ 70°C
SFP-GC00-SE	SFP to 1000BASE-T copper Module, 0°C ~ 70°C